



Flood Light

infoled@comexinter.cl
www.comexinternationaltrade.com

BAG Series

Specification:


- Nicely tieated die-casting ADC12 aluminum alloy housing
- 4mm tempered glass cover, strong protection and good optical function
- Waterproof:IP65
- Life Span:>35000 Hours
- Operating Temperature: -20-50°C
- Storage Temperature: -40-60°C

Application:


Advertisement board, Park, Parking lot, Building, Garden, Residential area, Landscape, Architectural decorative lighting, Roads and other places.




BR-FL-10W-02




BR-FL-20W-02
BR-FL-30W-02




Horizontal Installation

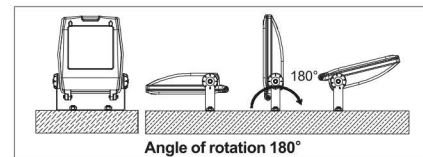


Vertical Installation

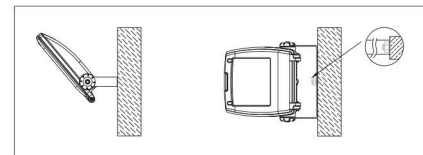


BR-FL-50W-02 / BR-FL-70W-02




BR-FL-80W-02 / BR-FL-100W-02




BR-FL-10W-02

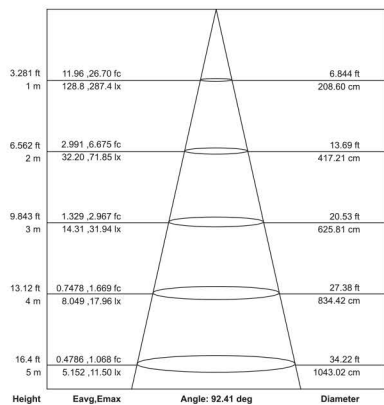


BR-FL-20W-02

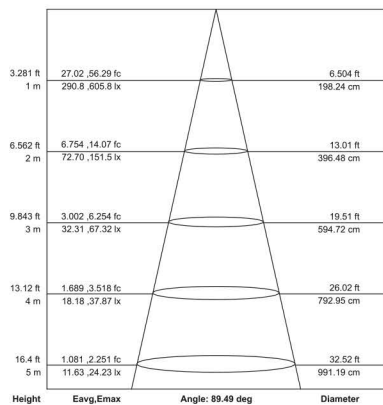


BR-FL-30W-02

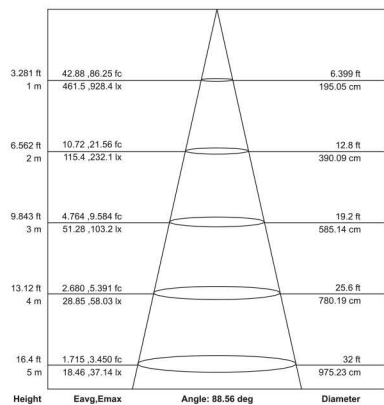


BR-FL-50W-02

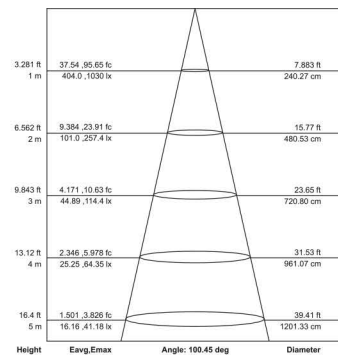


BR-FL-70W-02

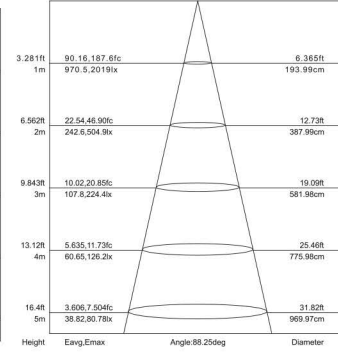

BR-FL-80W-02

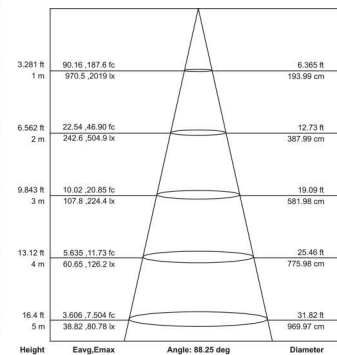

BR-FL-100W-02

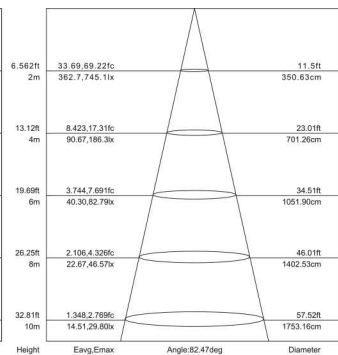

Model #	Color	LED Brand	CCT	Input Power	CRI	Luminous Flux	Working Voltage	Beam Angle	Weight
BR-FL-10W-02	Cool White	Epistar	6000 K	10W	>75	800 lm	AC110-240V	120°	0.82 kg
BR-FL-20W-02	Cool White	Epistar	6000 K	20W	>75	1600 lm	AC110-240V	120°	1.86 kg
BR-FL-30W-02	Cool White	Epistar	6000 K	30W	>75	2462 lm	AC110-240V	120°	1.95 kg

Optional: Bridgelux 45 mil

Model #	Color	LED Brand	CCT	Input Power	CRI	Luminous Flux	Working Voltage	Beam Angle	Weight
BR-FL-50W-02	Cool White	Epistar	6000 K	50W	>75	4041 lm	AC110-240V	120°	3.56 kg
BR-FL-70W-02	Cool White	Epistar	6000 K	70W	>75	4900 lm	AC110-240V	120°	3.56 kg
BR-FL-80W-02	Cool White	Epistar	6000 K	80W	>75	5600 lm	AC110-240V	120°	5.74 kg
BR-FL-100W-02	Cool White	Epistar	6000 K	100W	>75	8000 lm	AC110-240V	120°	5.8 kg

Optional: Bridgelux 45 mil

WWW.COMEXINTERNATIONALTRADE.COM

infoled@comexinter.cl