


Advertisement board, Park, Parking lot, Building, Garden, Residential area, Landscape, Architectural decorative lighting, Roads and other places.


80%




Installation drawing

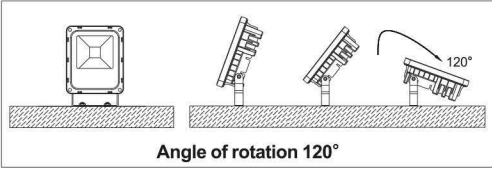


BR-FL-10W-08

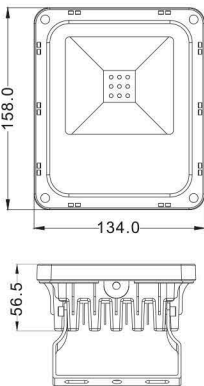


BR-FL-20W-08

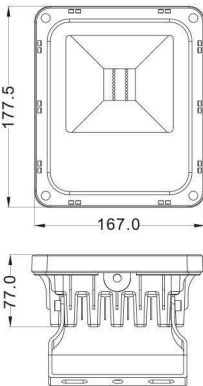

BR-FL-10W-08

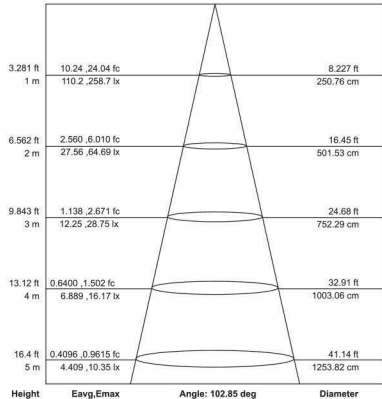

BR-FL-20W-08

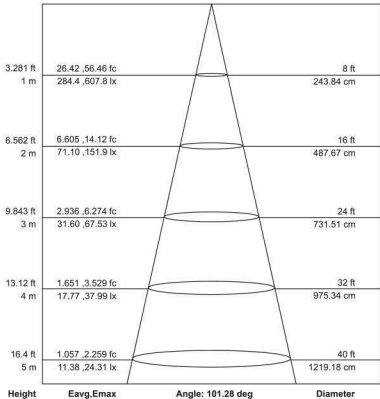

Flood Light

infoled@comexinter.cl
www.comexinternationaltrade.com

Features:


- Soft light with high light effect.
- Cold lighting source, no heat radiation, no harmful metal mercury, and environmental protection.
- Low power consumption, long lifespan, good stability, high reliability.
- Compared with the filament lamp of the same light effect, 80% reduction in energy consumption.
- Novel design, elegant and beautiful, with modern lighting features, easy to install and adjust.

Specification:


- Nicely treated die-casting AL 6063(ABS+PC) aluminum alloy housing
- 4mm tempered glass cover, strong protection and good optical function
- Waterproof: IP65
- Life Span: >35000 Hours
- Operating Temperature: -20-50°C
- Storage Temperature: -40-60°C




BR-FL-30W-08

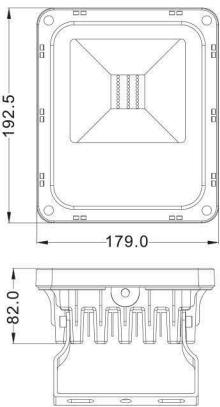


BR-FL-50W-08

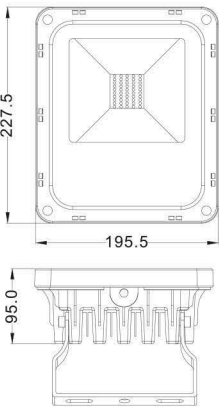


BR-FL-70W-08

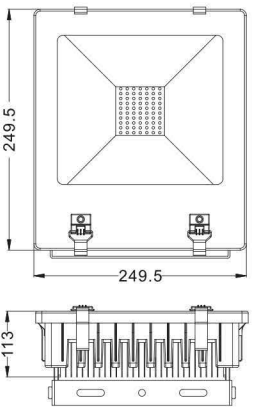


BR-FL-30W-08

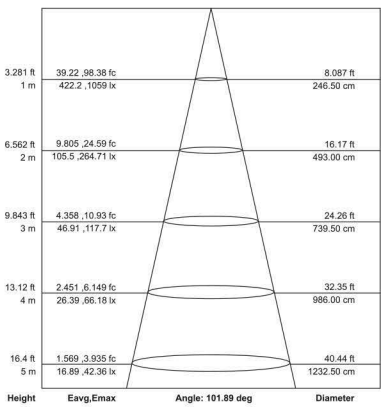

BR-FL-50W-08

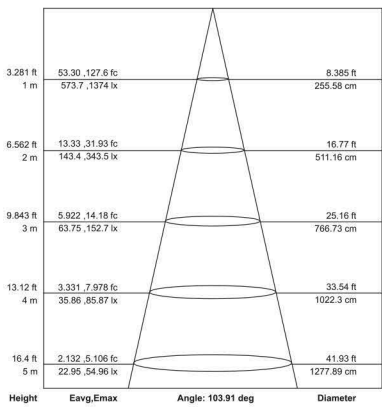

BR-FL-70W-08

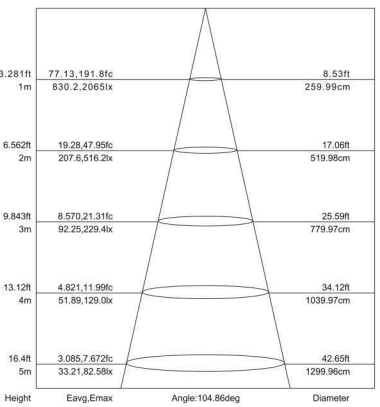

Model #	Color	LED Brand	CCT	Input Power	CRI	Luminous Flux	Working Voltage	Beam Angle	Weight
BR-FL-10W-08	Cool White	Epistar	6000 K	10W	>75	110lm	AC110-240V	120°	0.74 kg
BR-FL-20W-08	Cool White	Epistar	6000 K	20W	>75	110lm	AC110-240V	120°	1.06 kg
BR-FL-30W-08	Cool White	Epistar	6000 K	30W	>75	110lm	AC110-240V	120°	1.14 kg
BR-FL-50W-08	Cool White	Epistar	6000 K	50W	>75	110lm	AC110-240V	120°	2.12 kg
BR-FL-70W-08	Cool White	Epistar	6000 K	70W	>75	110lm	AC110-240V	120°	3.5 kg

Optional: Bridgelux 45 mil

WWW.COMEXINTERNATIONALTRADE.COM

PH Series

LED Flood Light