

Flood Light



Advertisement board, Park, Parking lot, Building, Garden, Residential area, Landscape, Architectural decorative lighting, Roads and other places.

Flood Light




Features:


- AL 6063+(ABS+PC)
- Soft light with high light effect.
- Cold lighting source, no heat radiation, no harmful metal mercury, and environmental protection.
- Low power consumption, long lifespan, good stability, high reliability.
- Compared with the filament lamp of the same light effect, **80%** reduction in energy consumption.
- Novel design, elegant and beautiful, with modern lighting features, easy to install and adjust.




Installation drawing

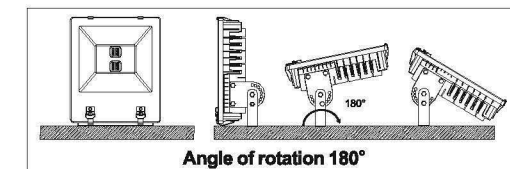


BR-FL-100W-03Q




BR-FL-120W-03Q




BR-FL-140W-03Q




BR-FL-160W-03Q




BR-FL-100W-03Q

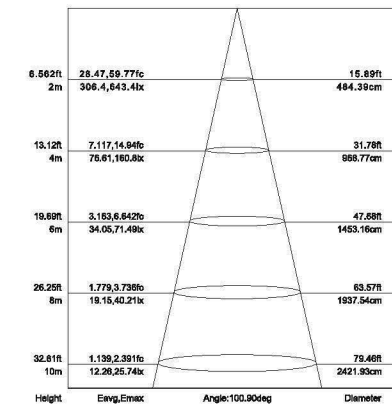


BR-FL-120W-03Q

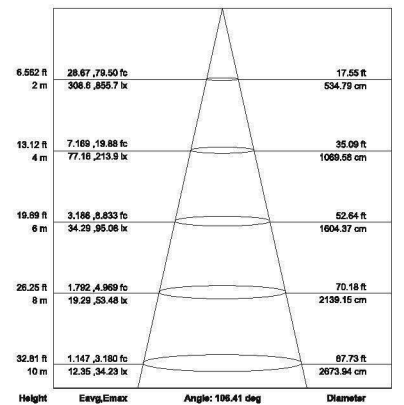

BR-FL-140W-03Q

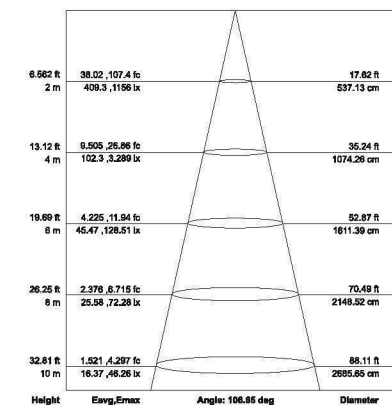

BR-FL-160W-03Q

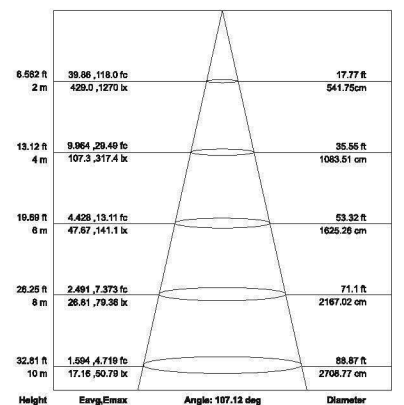

Model #	Color	LED Brand	CCT	Input Power	CRI	Luminous Flux	Working Voltage	Beam Angle	Weight
BR-FL-120W-03Q	Cool White	Epistar	6000 K	120W	>75	110 Lm	AC100-277V	120°	7.87Kg
BR-FL-160W-03Q	Cool White	Epistar	6000 K	160W	>75	110 Lm	AC100-277V	120°	10.43Kg
BR-FL-200W-03Q	Cool White	Epistar	6000 K	200W	>75	110 Lm	AC100-277V	120°	10.43Kg
BR-FL-240W-03Q	Cool White	Epistar	6000 K	240W	>75	110 Lm	AC100-277V	120°	10.43Kg

Optional: Bridgelux 45 ml