

GUBB Cast Junction Boxes for Drilling and Tapping Explosionproof, Dust-Ignitionproof

Drilled and tapped openings from 1/2" thru 4" as specified.

Class I, Division 1 and 2, Groups B, C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 3, 3R, 4, 7BCD, 9EFG



GUB 33



GUB 22 R




EJB 100806

Size LxWxD Inches/Millimeters	Cover Opening Inches/Millimeters	Form Number	Volume in ³ /dm ³	Catalog Number Malleable Iron [‡]	Aluminum [†]
7.00 x 6.50 x 6.75/ 177.8 x 165.1 x 171.5	5.38/136.7	1	120/ 2.0	GUBB-11	GUBB-11A
10.00 x 8.00 x 6.88/ 254.0 x 203.2 x 174.8	7.19/182.6	2	224/ 3.7	GUBB-22	GUBB-22A
12.00 x 12.00 x 7.75/ 304.8 x 304.8 x 196.9	9.69/246.1	3	455/ 7.5	GUBB-33	GUBB-33A

Class I, Division 1 Sealing Requirements

Box	Group	Seals Required [◆]
GUBB	B, C [◆]	Yes
GUBB	D	No

Catalog Number	Mounting Lugs
GUBB-11, 11A	2
GUBB-22, 22A	2
GUBB-33, 33A	4

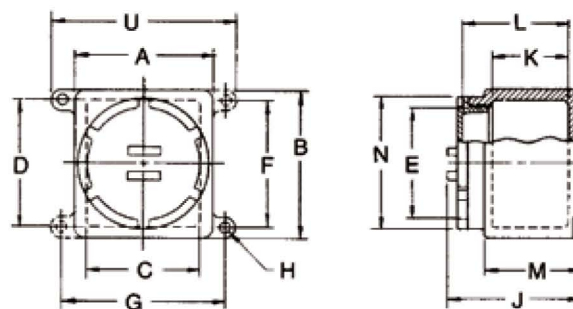

Catalog Number	Dimensions in Inches/Millimeters													
	A	B	C	D	E	F	G	H	J	K [†]	L	M	N	U
GUBB-11	6.50/	7.00/	5.50/	5.94/	5.38/	6.00/	7.75/	0.50/	6.75/	3.69/	5.25/	4.63/	6.25/	8.75/
GUBB-11A	165.1	177.8	139.7	150.9	163.7	152.4	196.9	12.7	171.5	93.7	133.4	117.6	158.8	222.3
GUBB-22	8.00/	10.00/	7.13/	9.00/	7.19/	9.00/	9.25/	0.50/	6.88/	3.50/	5.25/	4.63/	8.00/	10.25/
GUBB-22A	203.2	254.0	181.1	228.6	182.6	228.6	235.0	12.7	174.8	88.9	133.4	117.6	203.2	260.4
GUBB-33	12.00/	12.00/	10.75/	10.75/	9.69/	10.00/	13.13/	0.63/	7.75/	3.94/	5.75/	5.38/	11.00/	14.38/
GUBB-33A	304.8	304.8	273.1	273.1	246.1	254.0	333.5	16.0	196.9	100.0	146.1	136.7	279.4	365.3

[‡] Malleable iron and aluminum boxes furnished with aluminum cover.

[†] Inside dimensions.

[◆] Sealing fitting must be installed within 2" of each conduit entrance (max. conduit for Group B and C is 2"). Seals not required in Class I, Division 2 areas provided there are no arcing or sparking devices in the box.